


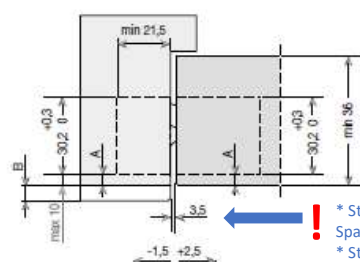
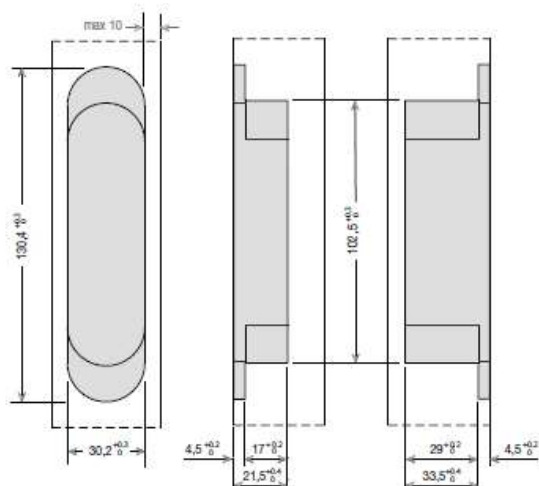
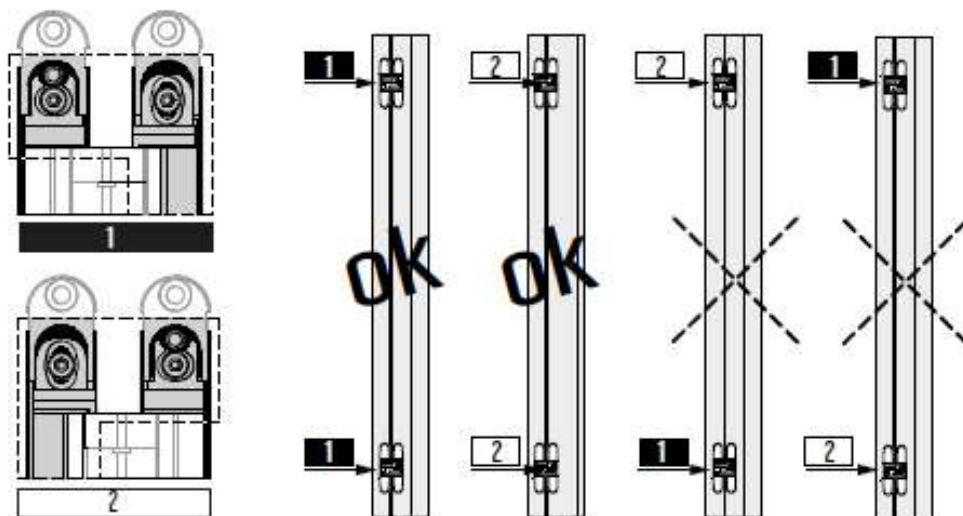
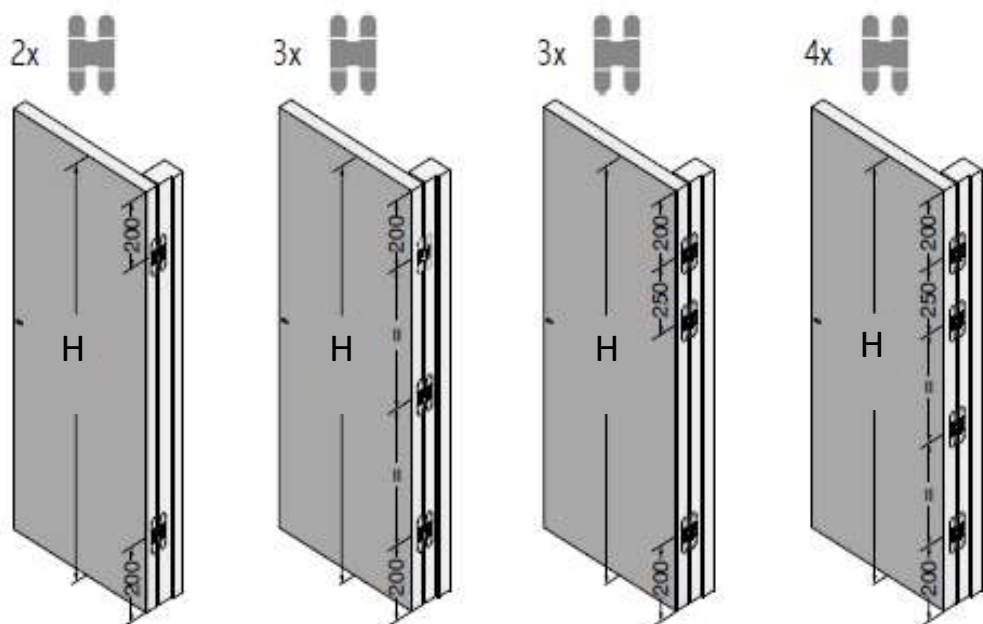


## Montageanleitung • Montagehandleiding • Installation Instruction

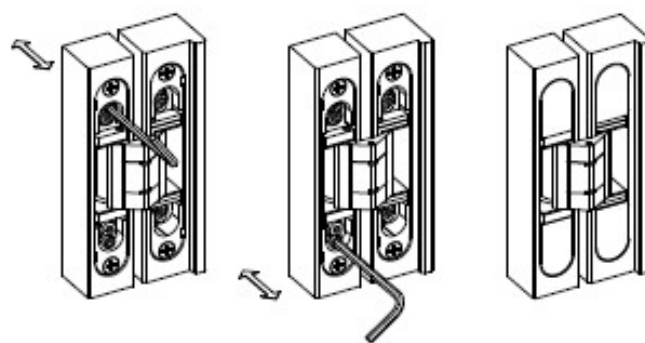

\* Standardmaß 3,5 mm – für geringeres Spaltmaß entsprechend tiefer infräsen  
 \* Standaard hangnaad 3,5 mm – voor minder afstand dieper infräsen  
 \* Standard gap 3,5 mm – mill in deeper for smaller gap

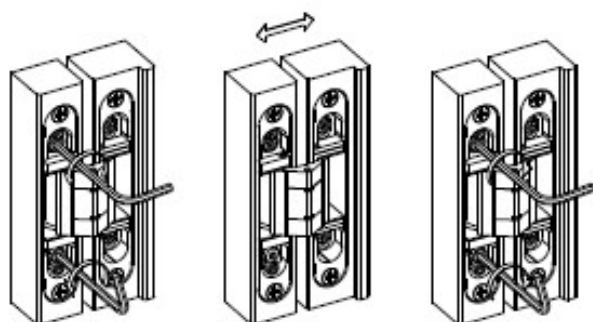

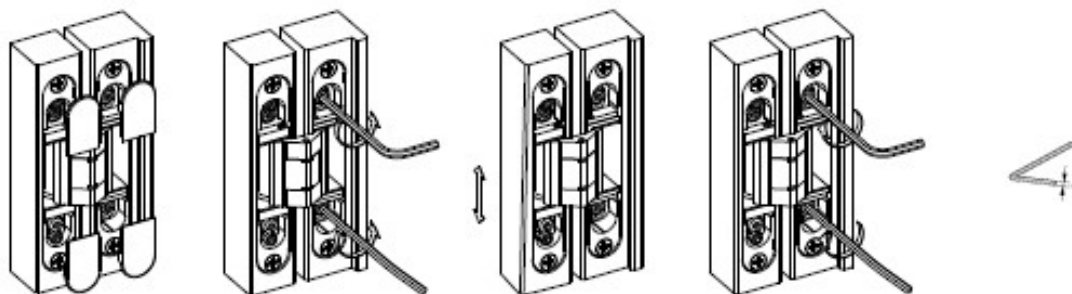

Tragkraft max.  
Draagvermogen max.  
Load capacity max.

|    |      |     |     |     |      |      |      |      |
|----|------|-----|-----|-----|------|------|------|------|
| H. | 2200 | 60  | 60  | 60  | 59   | 51   | 46   | 42   |
|    | 2100 | 60  | 60  | 60  | 55   | 48   | 44   | 40   |
|    | 2000 | 60  | 60  | 60  | 51   | 46   | 42   | 39   |
|    | 1900 | 60  | 60  | 55  | 48   | 43   | 40   | 38   |
|    |      | 700 | 800 | 900 | 1000 | 1100 | 1200 | 1300 |

Breite ■ breedte ■ width



Tragkraft max.  
Draagvermogen max.  
Load capacity max.

|    |      |     |     |     |      |      |      |      |
|----|------|-----|-----|-----|------|------|------|------|
| H. | 3000 | 80  | 80  | 80  | 80   | 80   | 80   | 80   |
|    | 2900 | 80  | 80  | 80  | 80   | 80   | 80   | 80   |
|    | 2800 | 80  | 80  | 80  | 80   | 80   | 80   | 75   |
|    | 2700 | 80  | 80  | 80  | 80   | 80   | 80   | 71   |
|    | 2600 | 80  | 80  | 80  | 80   | 80   | 76   | 67   |
|    | 2500 | 80  | 80  | 80  | 80   | 80   | 71   | 64   |
|    | 2400 | 80  | 80  | 80  | 80   | 77   | 67   | 61   |
|    | 2300 | 80  | 80  | 80  | 80   | 72   | 64   | 58   |
|    | 2200 | 80  | 80  | 80  | 78   | 67   | 60   | 56   |
|    | 2100 | 80  | 80  | 80  | 72   | 63   | 57   | 54   |
|    | 2000 | 80  | 80  | 80  | 67   | 60   | 55   | 52   |
|    |      | 700 | 800 | 900 | 1000 | 1100 | 1200 | 1300 |

Breite ■ breedte ■ width

4 St.

- BSW empfiehlt die Verwendung eines vierten Bandes bei Türen über 1000 mm Breite oder 2700 mm Höhe, installiert 250 mm unter dem oberen Band (siehe Zeichnung auf Seite 1). Bei der Verwendung von Türschließern empfiehlt BSW immer die Verwendung eines dritten bzw. vierten Bandes, installiert 250 mm unter dem oberen Band (siehe Zeichnungen auf Seite 1). Das rechnerische Türgewicht liegt bei Türschließern 30% über dem tatsächlichen Gewicht, bei Türautomaten oder Türstoppern 80% darüber.
- BSW adviseert om een 4e scharnier toe te passen bij het verwerken van deuren breder dan 1000mm of hoger dan 2700mm, plaatsing 250 mm onder het bovenste scharnier (zie tekening op blad 1). Bij toepassing van een deursluiser adviseert BSW altijd een 3e of 4e scharnier te monteren, plaatsing 250 mm onder het bovenste scharnier (zie tekeningen op blad 1). De belasting van een deur moet je bij toepassing van een deurdranger 30% hoger inschalen, bij een deurautomaat of deurstopper 80% hoger.
- BSW recommends to use a fourth hinge with doors wider than 1000 mm or higher than 2700 mm, to be installed 250 mm under the top hinge (see drawing on page 1). Together with door closers BSW recommends to always use a third or fourth hinge to be installed 250 mm under the top hinge (see drawings on page 1). With door closers please add an extra 30% to the actual door weight, with door operators or stoppers add 80%.

